


commBOX


Specifications Booklet

DECEMBER 2019

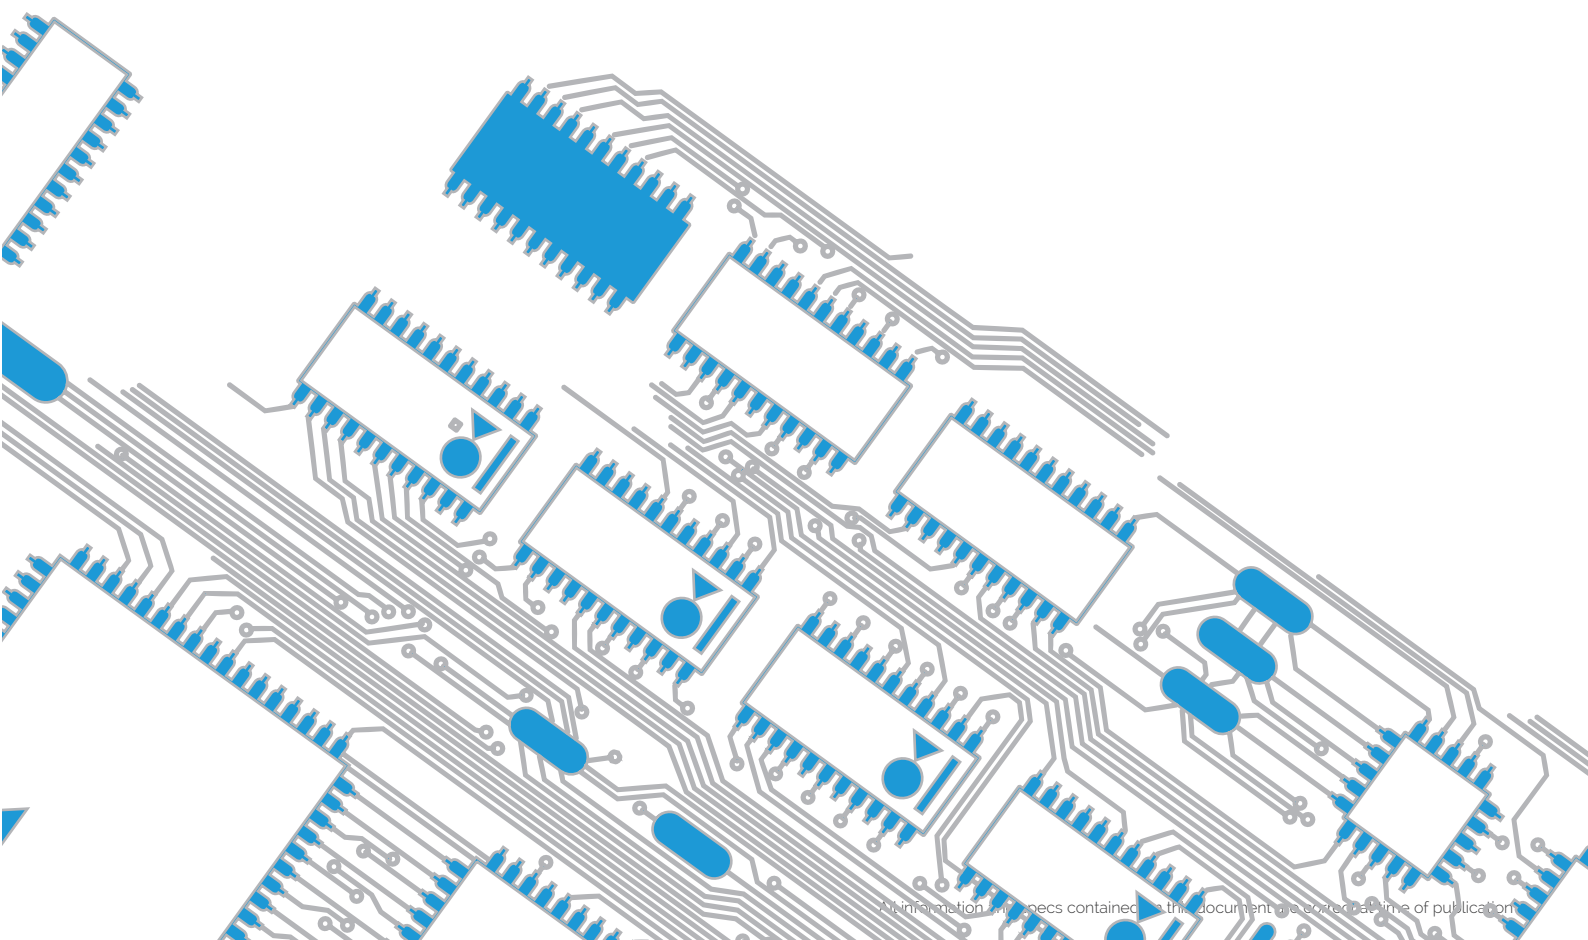

Contents


CommBox Interactive	2-12	Mounts	24-26
Classic	2-8	Brackets	24
Pulse	9-12	Stands	25-26
 CommBox Display	13-20	 CommBox Control	27-30
 Accessories	21-22	Core	27
ScreenBeam	21	Joey Micro 9	28
Sound Bar	22	Lite & Pro	29
 Install Mate	23	Panels	30

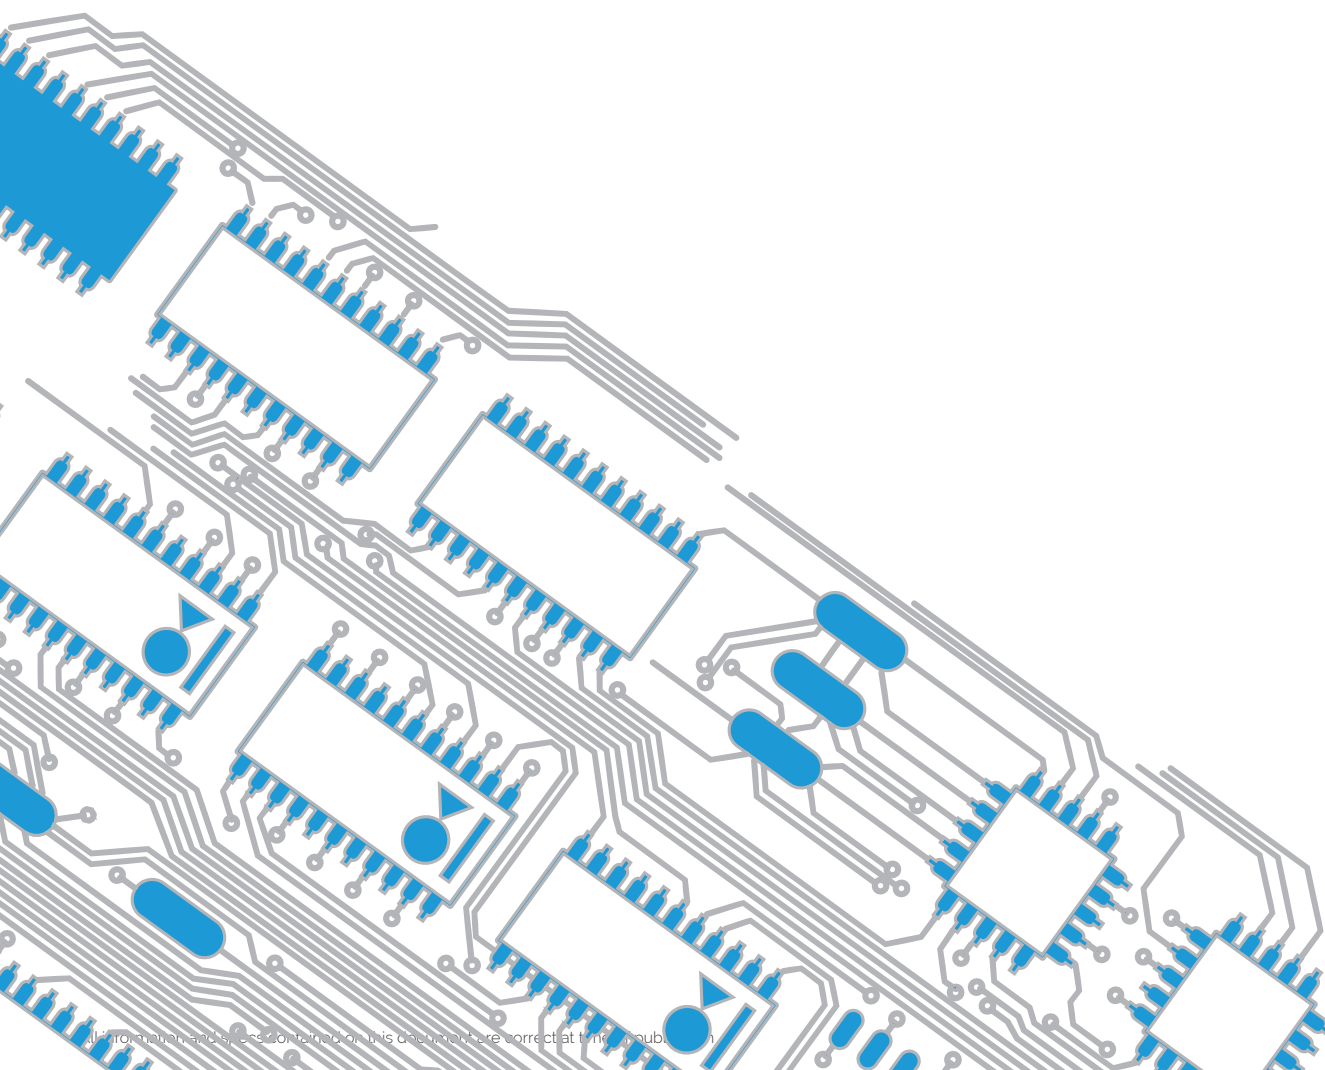

commBOX Interactive Classic 55 V3 Specs



Classic 55
CBIC55

SKU	
Resolution	UD 3840x2160 @60Hz
Brightness	350cd/m²
Contrast Ratio	1300:1
Response Time	6ms
Viewing Angle	178°
Operating Con	0C to 40C
Operating Humidity	20-80%
Power Req	AC 100 to 240V, 50/60Hz
Power Consumption	140 W
Standby Consumption	<0.5 W
Touch	20 Points, 1mm
Touch Technology	Infra Red
VESA	400 x 400, M6
Android	8.0, 3GB RAM, 16GB Storage
Speakers	2 x 15W / 8Ω
Input/Output	3 x 2.0 HDMI in (ARC & CEC), Display Port in, VGA in, AV in, Component in, OPS in, LAN in, LAN out, WiFi, 4 x USB A in, 2 x USB Touch in, PC Audio in, RS232 in, HDMI out, AV out, Optical out, Audio out
	
Screen Dims	1298.4 (W) x 811.37 (H) x 117.07 (D)mm
Screen Weight	34.5 kg
Packed Dims	1420 (W) x 910 (H) x 245 (D)mm
Packed Weight	42 kg
Accessories	Remote (w\Batteries), 2 x stylus, power cord, USB touch cable, HDMI cable & wall bracket
Warranty	3 Year Onsite (Optional 4 or 5 Year)

*All information and specs contained on this document are correct at time of publication

commBOX Interactive Classic 65 V3 Specs



Classic 65
CBIC65

SKU	
Resolution	UD 3840x2160 @60Hz
Brightness	450cd/m²
Contrast Ratio	1200:1
Response Time	6ms
Viewing Angle	178°
Operating Con	0C to 40C
Operating Humidity	20-80%
Power Req	AC 100 to 240V, 50/60Hz
Power Consumption	220 W
Standby Consumption	<0.5 W
Touch	20 Points, 1mm
Touch Technology	Infra Red
VESA	600 x 400, M8
Android	8.0, 3GB RAM, 16GB Storage
Speakers	2 x 15W / 8Ω
Input/Output	REAR: 2 x 2.0 HDMI in (ARC & CEC), Display Port in, VGA in, AV in, Component in, OPS in, LAN in, LAN out, WiFi, 2 x USB A in, 1 x USB Touch in, PC Audio in, RS232 in, HDMI out, AV out, Optical out, Audio out. FRONT: 1 x 2.0 HDMI in (ARC & CEC), 2 x USB A in, 1 x USB Touch in
Screen Dims	1506.3 (W) x 923.57 (H) x 119.57 (D)mm
Screen Weight	43.65 kg
Packed Dims	1660 (W) x 1045 (H) x 245 (D)mm
Packed Weight	57 kg
Accessories	Remote (w\Batteries), 2 x stylus, power cord, USB touch cable, HDMI cable & wall bracket

Warranty3 Year Onsite (Optional 4 or 5 Year)


*All information and specs contained on this document are correct at time of publication

commBOX Interactive Classic 75 V3 Specs



Classic 75
CBIC75

SKU	
Resolution	UD 3840x2160 @60Hz
Brightness	450cd/m²
Contrast Ratio	1200:1
Response Time	8ms
Viewing Angle	178'
Operating Con	0C to 40C
Operating Humidity	20-80%
Power Req	AC 100 to 240V, 50/60Hz
Power Consumption	400 W
Standby Consumption	<0.5 W
Touch	20 Points, 1mm
Touch Technology	Infra Red
VESA	600 x 400, M8
Android	8.0, 3GB RAM, 16GB Storage
Speakers	2 x 15W / 8Ω
Input/Output	REAR: 2 x 2.0 HDMI in (ARC & CEC), Display Port in, VGA in, AV in, Component in, OPS in, LAN in, LAN out, WiFi, 2 x USB A in, 1 x USB Touch in, PC Audio in, RS232 in, HDMI out, AV out, Optical out, Audio out. FRONT: 1 x 2.0 HDMI in (ARC & CEC), 2 x USB A in, 1 x USB Touch in
Screen Dims	1735.98 (W) x 1056.79 (H) x 127.22 (D)mm
Screen Weight	59.85 kg
Packed Dims	1880 (W) x 1160 (H) x 280 (D)mm
Packed Weight	75 kg
Accessories	Remote (w\Batteries), 2 x stylus, power cord, USB touch cable, HDMI cable & wall bracket




Warranty 3 Year Onsite (Optional 4 or 5 Year)

*All information and specs contained on this document are correct at time of publication

commBOX Interactive Classic 86 V3 Specs

	
SKU	Classic 86 CBIC86
Resolution	UD 3840x2160 @60Hz
Brightness	400cd/m ²
Contrast Ratio	1200:1
Response Time	8ms
Viewing Angle	178°
Operating Con	0C to 40C
Operating Humidity	20-80%
Power Req	AC 100 to 240V, 50/60Hz
Power Consumption	440 W
Standby Consumption	<0.5 W
Touch	20 Points, 1mm
Touch Technology	Infra Red
VESA	700 x 400, M8
Android	8.0, 3GB RAM, 16GB Storage
Speakers	2 x 15W / 8Ω
Input/Output	REAR: 2 x 2.0 HDMI in (ARC & CEC), Display Port in, VGA in, AV in, Component in, OPS in, LAN in, LAN out, WiFi, 2 x USB A in, 1 x USB Touch in, PC Audio in, RS232 in, HDMI out, AV out, Optical out, Audio out. FRONT: 1 x 2.0 HDMI in (ARC & CEC), 2 x USB A in, 1 x USB Touch in

	
Screen Dims	1991.57 (W) x 1204.88 (H) x 136.47 (D)mm
Screen Weight	79 kg
Packed Dims	2140 (W) x 1340 (H) x 280 (D)mm
Packed Weight	99.5 kg
Accessories	Remote with batteries, 2 x stylus, power cord, USB touch cable, HDMI cable & wall bracket


Warranty	3 Year Onsite (Optional 4 or 5 Year)
----------	--------------------------------------

commBOX Interactive Classic 98 V3 Specs



Classic 98
CBIC98

SKU	
Resolution	UD 3840x2160 @60Hz
Brightness	460cd/m²
Contrast Ratio	1200:1
Response Time	8ms
Viewing Angle	178°
Operating Con	0C to 40C
Operating Humidity	20-80%
Power Req	AC 100 to 240V, 50/60Hz
Power Consumption	550 W
Standby Consumption	<0.5 W
Touch	20 Points, 1mm
Touch Technology	Infra Red
VESA	800 x 600, M8
Android	8.0, 3GB RAM, 16GB Storage
Speakers	2 x 15W / 8Ω
Input/Output	REAR: 2 x 2.0 HDMI in (ARC & CEC), Display Port in, VGA in, AV in, Component in, OPS in, LAN in, LAN out, WiFi, 2 x USB A in, 1 x USB Touch in, PC Audio in, RS232 in, HDMI out, AV out, Optical out, Audio out. FRONT: 1 x 2.0 HDMI in (ARC & CEC), 2 x USB A in, 1 x USB Touch in
Screen Dims	2249.9 (W) x 1340.4 (H) x 108.2 (D)mm
Screen Weight	116 kg
Packed Dims	2525 (W) x 1750 (H) x 435 (D)mm
Packed Weight	170 kg
Accessories	Remote (w\Batteries), 2 x stylus, power cord, USB touch cable, HDMI cable & wall bracket
Warranty	3 Year Onsite (Optional 4 or 5 Year)



commBOX Interactive Classic V3 Specs

MODELS




Classic 55
CBIC55



Classic 65
CBIC65

SKU	Classic 55 CBIC55	Classic 65 CBIC65
Resolution	UD 3840x2160 @60Hz	UD 3840x2160 @60Hz
Brightness	350cd/m ²	450cd/m ²
Contrast Ratio	1300:1	1200:1
Response Time	6ms	6ms
Viewing Angle	178°	178°
Operating Con	0°C to 40°C	0°C to 40°C
Operating Humidity	20-80%	20-80%
Power Req	AC 100 to 240V, 50/60Hz	AC 100 to 240V, 50/60Hz
Power Consumption	140 W	220 W
Standby Consumption	<0.5 W	<0.5 W
Touch	20 Points, 1mm	20 Points, 1mm
Touch Technology	Infra Red	Infra Red
VESA	400 x 400, M6	600 x 400, M8
Android	8.0, 3GB RAM, 16GB Storage	8.0, 3GB RAM, 16GB Storage
Speakers	2 x 15W / 8Ω	2 x 15W / 8Ω
Input/Output	REAR: 2 x 2.0 HDMI in (ARC & CEC), Display Port in, VGA in, AV in, Component in, OPS in, LAN in, LAN out, WiFi, 2 x USB A in, 1 x USB Touch in, PC Audio in, RS232 in, HDMI out, AV out, Optical out, Audio out. FRONT: 1 x 2.0 HDMI in (ARC & CEC), 2 x USB A in, 1 x USB Touch in	



Screen Dims 1298.4 (W) x 811.37 (H)
x 117.07 (D)mm


Screen Weight 34.5 kg

Packed Dims 1420 (W) x 910 (H)
x 245 (D)mm

Packed Weight 42 kg

Accessories Remote (w\Batteries), 2 x stylus,
power cord, USB touch cable,
HDMI cable & wall bracket

Warranty 3 Year Onsite (Optional 4 or 5 Year)



Screen Dims 1506.3 (W) x 923.57 (H)
x 119.57 (D)mm

Screen Weight 43.65 kg

Packed Dims 1660 (W) x 1045 (H)
x 245 (D)mm

Packed Weight 57 kg

Accessories Remote (w\Batteries), 2 x stylus,
power cord, USB touch cable,
HDMI cable & wall bracket

Warranty 3 Year Onsite (Optional 4 or 5 Year)



Classic 75
CBIC75



Classic 86
CBIC86



Classic 98
CBIC98

UD 3840x2160 @60Hz

450cd/m²

1200:1

8ms

178'

0C to 40C

20-80%

AC 100 to 240V, 50/60Hz

400 W

<0.5 W

20 Points, 1mm

Infra Red

600 x 400, M8

8.0, 3GB RAM, 16GB Storage

2 x 15W / 8Ω

UD 3840x2160 @60Hz

400cd/m²

1200:1

8ms

178'

0C to 40C

20-80%

AC 100 to 240V, 50/60Hz

440 W

<0.5 W

20 Points, 1mm

Infra Red

700 x 400, M8

8.0, 3GB RAM, 16GB Storage

2 x 15W / 8Ω

UD 3840x2160 @60Hz

460cd/m²

1200:1

8ms

178'

0C to 40C

20-80%

AC 100 to 240V, 50/60Hz

550 W

<0.5 W

20 Points, 1mm


Infra Red

800 x 600, M8

8.0, 3GB RAM, 16GB Storage

2 x 15W / 8Ω

REAR: 2 x 2.0 HDMI in (ARC & CEC), Display Port in, VGA in, AV in, Component in, OPS in, LAN in, LAN out, WiFi, 2 x USB A in, 1 x USB Touch in, PC Audio in, RS232 in, HDMI out, AV out, Optical out, Audio out. FRONT: 1 x 2.0 HDMI in (ARC & CEC), 2 x USB A in, 1 x USB Touch in




1735.98 (W) x 1056.79 (H)
x 127.22 (D)mm

59.85 kg

1880 (W) x 1160 (H)
x 280 (D)mm

75 kg




1991.57 (W) x 1204.88 (H)
x 136.47 (D)mm

79 kg

2140 (W) x 1340 (H)
x 280 (D)mm

99.5 kg



2249.9 (W) x 1340.4 (H)
x 108.2 (D)mm

116 kg

2525 (W) x 1750 (H)
x 435 (D)mm

170 kg

Remote (w\Batteries), 2 x stylus,
power cord, USB touch cable,
HDMI cable & wall bracket

Remote with batteries, 2 x stylus,
power cord, USB touch cable,
HDMI cable & wall bracket

Remote (w\Batteries), 2 x stylus,
power cord, USB touch cable,
HDMI cable & wall bracket

3 Year Onsite (Optional 4 or 5 Year)

3 Year Onsite (Optional 4 or 5 Year)

3 Year Onsite (Optional 4 or 5 Year)

commBOXInteractive Pulse 55 V3 Specs

	
	Pulse 55
SKU	CBIP55
Resolution	UD 3840x2160 @60Hz
Brightness	350cd/m2
Glass	Anti-glare
Viewing Angle	178'
Response Time	< 30ms
Operating Humidity	10- 90%
Operating Con	0C to 40C
Power Req	AC 100 to 240V, 50/60Hz
Power Max	250W
Power Standby	<0.5W
Touch	20 points , 1mm
Touch Technology	PCAP
Android	7.0, 2GB RAM, 16GB Storage
VESA	400 x 200, M8
Speakers	10W x 2 + 15W Sub
Input/Output	OPS PC Slot, VGA In, 2 x HDMI In, 1 x HDMI Out, 1 x AV In, 1 x Audio In, 1 x Audio Out, Optical In, 2 x USB Touch, 4 x USB 2.0, 1 x USB 3.0, Ethernet, RS232
	
Screen Dims	1269 (W) x 747 (H) x 87 (D)mm
Screen Weight	29kg
Packed Dims	1428 (W) x 845 (H) x 220 (D)mm
Packed Weight	40.6kg
Accessories	Remote (w\Batteries), HDMI Cable, Slot-in WIFI module, USB touch cable, power cord & wall bracket
Warranty	3 Year Onsite (Optional 4 or 5 Year)

*All information and specs contained on this document are correct at time of publication

commBOX Interactive Pulse 65 V3 Specs



Pulse 65

SKU	CBIP65
Resolution	UD 3840x2160 @60Hz
Brightness	350cd/m2
Glass	Anti-glare
Viewing Angle	178°
Response Time	6ms
Operating Humidity	10- 90%
Operating Con	0C to 40C
Power Req	AC 100 to 240V, 50/60Hz
Power Max	300W
Power Standby	<0.5W
Touch	20 points , 1mm
Touch Technology	PCAP
Android	7.0, 2GB RAM, 16GB Storage
VESA	600 x 400, M8
Speakers	10W x 2 + 15W Sub
Input/Output	OPS PC Slot, VGA In, 2 x HDMI In, 1 x HDMI Out, 1 x AV In, 1 x Audio In, 1 x Audio Out, Optical In, 2 x USB Touch, 4 x USB 2.0, 1 x USB 3.0, Ethernet, RS232
Screen Dims	1493 (W) x 872 (H) x 88 (D)mm
Screen Weight	41kg
Packed Dims	1697 (W) x 1039 (H) x 220 (D)mm
Packed Weight	53kg
Accessories	Remote (w\Batteries), HDMI Cable, Slot-in WIFI module, USB touch cable, power cord & wall bracket
Warranty	3 Year Onsite (Optional 4 or 5 Year)




commBOX Interactive Pulse 86 V3 Specs



Pulse 86

SKU	CBIP86
Resolution	UD 3840x2160 @60Hz
Brightness	350cd / m2
Glass	Anti-glare
Viewing Angle	178°
Response Time	8ms
Operating Humidity	10- 90%
Operating Con	0C to 40C
Power Req	AC 100 to 240V, 50/60Hz
Power Max	500W
Power Standby	<0.5W
Touch	20 points , 1mm
Touch Technology	PCAP
Android	8.0, 4GB RAM, 32GB Storage
VESA	800 x 600, M8
Speakers	10W x 2 + 15W Sub
Input/Output	OPS PC Slot, VGA In, 3 x HDMI In, 1 x HDMI Out, 1 x AV In, 1 x Audio In, 1 x Audio Out, Optical In, 2 x USB Touch, 3 x USB 2.0, 3 x USB 3.0, Ethernet, RS232
Screen Dims	1962 (W) x 1136 (H) x 85 (D)mm
Screen Weight	71.5kg
Packed Dims	2166 (W) x 1336 (H) x 280 (D)mm
Packed Weight	93.5kg
Accessories	Remote (w\Batteries), HDMI Cable, Slot-in WIFI module, USB touch cable, 2 x Active Stylus Pen w/ charging box, power cord & wall bracket.
Warranty	3 Year Onsite (Optional 4 or 5 Year)



commBOX Interactive Pulse V3 Specs

MODELS



Pulse 55

CBIP55



Pulse 65

CBIP65



Pulse 86

CBIP86

Resolution	UD 3840x2160 @60Hz	UD 3840x2160 @60Hz	UD 3840x2160 @60Hz
Brightness	350cd/m2	350cd/m2	350cd / m2
Glass	Anti-glare	Anti-glare	Anti-glare
Viewing Angle	178°	178°	178°
Response Time	< 30ms	6ms	8ms
Operating Humidity	10- 90%	10- 90%	10- 90%
Operating Con	0C to 40C	0C to 40C	0C to 40C
Power Req	AC 100 to 240V, 50/60Hz	AC 100 to 240V, 50/60Hz	AC 100 to 240V, 50/60Hz
Power Max	250W	300W	500W
Power Standby	<0.5W	<0.5W	<0.5W
Touch	20 points , 1mm	20 points , 1mm	20 points , 1mm
Touch Technology	PCAP	PCAP	PCAP
Android	7.0, 2GB RAM, 16GB Storage	7.0, 2GB RAM, 16GB Storage	8.0, 4GB RAM, 32GB Storage
VESA	400 x 200, M8	600 x 400, M8	800 x 600, M8
Speakers	10W x 2 + 15W Sub	10W x 2 + 15W Sub	10W x 2 + 15W Sub
Input/Output	OPS PC Slot, VGA In, 2 x HDMI In, 1 x HDMI Out, 1 x AV In, 1 x Audio In, 1 x Audio Out, Optical In, 2 x USB Touch, 4 x USB 2.0, 1 x USB 3.0, Ethernet, RS232	OPS PC Slot, VGA In, 2 x HDMI In, 1 x HDMI Out, 1 x AV In, 1 x Audio In, 1 x Audio Out, Optical In, 2 x USB Touch, 4 x USB 2.0, 1 x USB 3.0, Ethernet, RS232	OPS PC Slot, VGA In, 3 x HDMI In, 1 x HDMI Out, 1 x AV In, 1 x Audio In, 1 x Audio Out, Optical In, 2 x USB Touch, 3 x USB 2.0, 3 x USB 3.0, Ethernet, RS232



1269 (W) x 747 (H)
x 87 (D)mm



1493 (W) x 872 (H)
x 88 (D)mm



1962 (W) x 1136 (H)
x 85 (D)mm

Screen Dims

Screen Weight

Packed Dims

Packed Weight

Accessories

Remote (w\Batteries),
HDMI Cable, Slot-in WIFI
module, USB touch cable,
power cord & wall bracket

Remote (w\Batteries),
HDMI Cable, Slot-in WIFI
module, USB touch cable,
power cord & wall bracket

Remote (w\Batteries), HDMI Cable,
Slot-in WIFI module, USB touch cable,
2 x Active Stylus Pen w/ charging box,
power cord & wall bracket.

Warranty

3 Year Onsite
(Optional 4 or 5 Year)

3 Year Onsite
(Optional 4 or 5 Year)

3 Year Onsite
(Optional 4 or 5 Year)

*All information and specs contained on this document are correct at time of publication

commBOX Display 43" Specs



43 4K

CBD43

SKU	CBD43
Display Area	42.51"
Resolution	3840x2160 UHD
Brightness (nits)	350cd / m2
Contrast Ratio	1100:1
Viewing Angle	178°
Response Time	6ms
Operating Temp	0C to 40C
Operating Humidity	20-85%
VESA	400 x 200mm
Power	AC 100 to 240V, 50/60Hz
Consumption Typ.	80W
Speakers	5W X 2
Connectivity	1 x HDMI 2.0 in, 1 x VGA in, 1 x USB 2.0 in, 1 x Line in, 1 x Line out, 1 x RS232 in, 1 x RS232 out
Android	N/A



Screen Dims	969.9(W)X 558.3(H) X 84.8(D)mm
Screen Weight	9kg
Packed Dims	1070(W) x 663(H) x 153(D)mm
Packed Weight	12.2kg
Accessories	Remote control (w/ batteries), power cord & wall bracket
Warranty	5 Year Onsite

commBOX Display 55" Specs

	
	55 4K
SKU	CBD55
Display Area	54.64"
Resolution	3840x2160 UHD
Brightness (nits)	350cd / m2
Contrast Ratio	1200:1
Viewing Angle	178°
Response Time	6ms
Operating Temp	0C to 40C
Operating Humidity	20-85%
VESA	400 x 400mm
Power	AC 100 to 240V, 50/60Hz
Consumption Typ.	140W
Speakers	5W X 2
Connectivity	1 x HDMI 2.0 in, 1 x VGA in, 1 x USB 2.0 in, 1 x Line in, 1 x Line out, 1 x RS232 in, 1 x RS232 out
Android	N/A
	
Screen Dims	1243.2(W) x 714(H) x 69.6(D)mm
Screen Weight	15kg
Packed Dims	1364(W) x 824(H) x 154(D)mm
Packed Weight	18.6kg
Accessories	Remote control (w/ batteries), power cord & wall bracket
Warranty	5 Year Onsite

commBOX Display 65" Specs



65 4K

CBD65

SKU	CBD65
Display Area	64.53"
Resolution	3840x2160 UHD
Brightness (nits)	350cd / m2
Contrast Ratio	1300:1
Viewing Angle	178'
Response Time	6ms
Operating Temp	0C to 40C
Operating Humidity	20-85%
VESA	600 x 400mm
Power	AC 100 to 240V, 50/60Hz
Consumption Typ.	170W
Speakers	8W X 2
Connectivity	1 x HDMI 2.0 in, 1 x VGA in, 1 x USB 2.0 in, 1 x Line in, 1 x Line out, 1 x RS232 in, 1 x RS232 out, 1 x OPS slot
Android	N/A



Screen Dims	1467.7(W)X 851.7(H) X 79.8(D)mm
Screen Weight	28.5kg
Packed Dims	1660(W) x 1045(H) x 245(D)mm
Packed Weight	40kg
Accessories	Remote control (w/ batteries), power cord & wall bracket
Warranty	5 Year Onsite

commBOX Display 75" Specs




75 4K

CBD75A5

SKU	CBD75A5
Display Area	74.52"
Resolution	3840x2160 UHD
Brightness (nits)	450cd / m2
Contrast Ratio	1200:1
Viewing Angle	178°
Response Time	8ms
Operating Temp	0C to 40C
Operating Humidity	20-85%
VESA	600 x 400mm
Power	AC 100 to 240V, 50/60Hz
Consumption Typ.	400W
Speakers	15W X 2
Connectivity	1 x HDMI 1.4 in, 2 x HDMI 2.0 in, 1 x HDMI out, 1 x Display Port in, 1 x DVI-D in, 1 x LAN in, 1 x VGA in, 1 x Line in, 1 x Component in, 1 x AV in, 1 x AV out, 1 x S/PDIF out, 1 x OPS slot, 1 x USB 2.0 in, 1 x Earphone out, 1 x RS232 in, 1 x Wifi
Android	Android 5.0. 2GB RAM, 8GB Storage
Screen Dims	 1714.2(W) x 992.4(H) x 97.2(D)mm
Screen Weight	41kg
Packed Dims	1880(W) x 1125(H) x 245(D)mm
Packed Weight	53kg
Accessories	Remote control (w/ batteries), power cord & wall bracket
Warranty	5 Year Onsite

commBOX Display 86" Specs

	
	86 4K
SKU	CBD86A5
Display Area	85.60"
Resolution	3840x2160 UHD
Brightness (nits)	400cd / m2
Contrast Ratio	1200:1
Viewing Angle	178°
Response Time	8ms
Operating Temp	0C to 40C
Operating Humidity	20-85%
VESA	700 x 400mm
Power	AC 100 to 240V, 50/60Hz
Consumption Typ.	440W
Speakers	15W X 2
Connectivity	1 x HDMI 1.4 in, 2 x HDMI 2.0 in, 1 x HDMI out, 1 x Display Port in, 1 x DVI-D in, 1 x LAN in, 1 x VGA in, 1 x Line in, 1 x Component in, 1 x AV in, 1 x AV out, 1 x S/PDIF out, 1 x OPS slot, 1 x USB 2.0 in, 1 x Earphone out, 1 x RS232 in, 1 x Wifi
Android	Android 5.0, 2GB RAM, 8GB Storage
	
Screen Dims	1962(W)X 1133(H) X 102.6(D)mm
Screen Weight	57kg
Packed Dims	2125(W) x 1275(H) x 275(D)mm
Packed Weight	77kg
Accessories	Remote control (w/ batteries), power cord & wall bracket
Warranty	5 Year Onsite


commBOX Display 98" Specs



98 4K

CBD98A5

SKU	CBD98A5
Display Area	97.52"
Resolution	3840x2160 UHD
Brightness (nits)	500cd / m2
Contrast Ratio	1300:1
Viewing Angle	178°
Response Time	5ms
Operating Temp	0C to 40C
Operating Humidity	20-85%
VESA	800 x 600mm
Power	AC 100 to 240V, 50/60Hz
Consumption Typ.	550W
Speakers	15W X 2
Connectivity	1 x HDMI 1.4 in, 2 x HDMI 2.0 in, 1 x HDMI out, 1 x Display Port in, 1 x DVI-D in, 1 x LAN in, 1 x VGA in, 1 x Line in, 1 x Component in, 1 x AV in, 1 x AV out, 1 x S/PDIF out, 1 x OPS slot, 1 x USB 2.0 in, 1 x Earphone out, 1 x RS232 in, 1 x Wifi
Android	Android 5.0, 2GB RAM, 8GB Storage



Screen Dims	2198.8(W) x 1253.8(H) x 109.5(D)mm
Screen Weight	106kg
Packed Dims	2525(W) x 1750(H) x 435(D)mm
Packed Weight	157kg
Accessories	Remote control (w/ batteries), power cord & wall bracket
Warranty	5 Year Onsite

commBOX Display Specs

MODELS

			
SKU	CBD43FHD	CBD43	CBD55
Display Area	42.51"	42.51"	54.64"
Resolution	1920 x 1080	3840x2160 UHD	3840x2160 UHD
Brightness (nits)	350cd / m2	350cd / m2	350cd / m2
Contrast Ratio	1000:1	1100:1	1200:1
Viewing Angle	178'	178'	178'
Response Time	6ms	6ms	6ms
Operating Temp	0C to 40C	0C to 40C	0C to 40C
Operating Humidity	20-85%	20-85%	20-85%
VESA	400 x 200mm	400 x 200mm	400 x 400mm
Power	AC 100 to 240V, 50/60Hz	AC 100 to 240V, 50/60Hz	AC 100 to 240V, 50/60Hz
Consumption Typ.	80W	80W	140W
Speakers	5W X 2	5W X 2	5W X 2
Connectivity	1 x HDMI 2.0 in, 1 x VGA in, 1 x USB 2.0 in, 1 x Line in, 1 x Line out, 1 x RS232 in, 1 x RS232 out	1 x HDMI 2.0 in, 1 x VGA in, 1 x USB 2.0 in, 1 x Line in, 1 x Line out, 1 x RS232 in, 1 x RS232 out	1 x HDMI 2.0 in, 1 x VGA in, 1 x USB 2.0 in, 1 x Line in, 1 x Line out, 1 x RS232 in, 1 x RS232 out
Android	N/A	N/A	N/A
Screen Dims	 969.9(W)X 558.3(H) X 84.8(D)mm	 969.9(W)X 558.3(H) X 84.8(D)mm	 1243.2(W) x 714(H) x 69.6(D)mm
Screen Weight	9kg	9kg	15kg
Packed Dims	1070(W) x 663(H) x 153(D)mm	1070(W) x 663(H) x 153(D)mm	1364(W) x 824(H) x 154(D)mm
Packed Weight	12.2kg	12.2kg	18.6kg
Accessories	Remote control (w/ batteries), power cord & wall bracket	Remote control (w/ batteries), power cord & wall bracket	Remote control (w/ batteries), power cord & wall bracket
Warranty	5 Year Onsite	5 Year Onsite	5 Year Onsite



65 4K

CBD65



75 4K

CBD75A5



86 4K

CBD86A5



98 4K

CBD98A5

64.53"

3840x2160 UHD

350cd / m2

1300:1

178'

6ms

0C to 40C

20-85%

600 x 400mm

AC 100 to 240V, 50/60Hz

170W

8W X 2

1 x HDMI 2.0 in, 1 x VGA in,
1 x USB 2.0 in, 1 x Line in,
1 x Line out, 1 x RS232 in,
1 x RS232 out, 1 x OPS slot

N/A

74.52"

3840x2160 UHD

450cd / m2

1200:1

178'

8ms

0C to 40C

20-85%

600 x 400mm

AC 100 to 240V, 50/60Hz

400W

15W X 2

1 x HDMI 1.4 in, 2 x HDMI 2.0 in, 1
x HDMI out, 1 x Display Port in, 1 x
DVI-D in, 1 x LAN in, 1 x VGA in, 1 x
Line in, 1 x Component in, 1 x AV in,
1 x AV out, 1 x S/PDIF out, 1 x OPS
slot, 1 x USB 2.0 in, 1 x Earphone
out, 1 x RS232 in, 1 x Wifi

Android 5.0,
2GB RAM, 8GB Storage

85.60"

3840x2160 UHD

400cd / m2

1200:1

178'

8ms

0C to 40C

20-85%

700 x 400mm

AC 100 to 240V, 50/60Hz

440W

15W X 2

1 x HDMI 1.4 in, 2 x HDMI 2.0 in, 1
x HDMI out, 1 x Display Port in, 1 x
DVI-D in, 1 x LAN in, 1 x VGA in, 1 x
Line in, 1 x Component in, 1 x AV in,
1 x AV out, 1 x S/PDIF out, 1 x OPS
slot, 1 x USB 2.0 in, 1 x Earphone
out, 1 x RS232 in, 1 x Wifi

Android 5.0,
2GB RAM, 8GB Storage

97.52"

3840x2160 UHD

500cd / m2

1300:1

178'

5ms

0C to 40C

20-85%

800 x 600mm

AC 100 to 240V, 50/60Hz

550W

15W X 2

1 x HDMI 1.4 in, 2 x HDMI 2.0 in, 1
x HDMI out, 1 x Display Port in, 1 x
DVI-D in, 1 x LAN in, 1 x VGA in, 1 x
Line in, 1 x Component in, 1 x AV in,
1 x AV out, 1 x S/PDIF out, 1 x OPS
slot, 1 x USB 2.0 in, 1 x Earphone
out, 1 x RS232 in, 1 x Wifi

Android 5.0,
2GB RAM, 8GB Storage



1467.7(W)X 851.7(H)
X 79.8(D)mm

28.5kg

1660(W) x 1045(H) x
245(D)mm

40kg



1714.2(W) x 992.4(H)
x 97.2(D)mm

41kg

1880(W) x 1125(H) x
245(D)mm

53kg



1962(W)X 1133(H)
X 102.6(D)mm

57kg

2125(W) x 1275(H) x
275(D)mm

77kg



2198.8(W) x 1253.8(H)
x 109.5(D)mm

106kg

2525(W) x 1750(H) x
435(D)mm

157kg

Remote control (w/ batteries),
power cord & wall bracket

Remote control (w/ batteries),
power cord & wall bracket

Remote control (w/ batteries),
power cord & wall bracket

Remote control (w/ batteries),
power cord & wall bracket

5 Year Onsite

5 Year Onsite

5 Year Onsite

5 Year Onsite

commBOX Premium Sound Bar Specs



SKU	CBSOUNDP
Dimensions	954 x 92 x 65mm
Weight	2.8KG
Packed Dimensions	1030 x 140 x 165mm
Packed Weight	5KG
Frequency	80Hz - 20 KHz
Technology	MAXX BASS
Power	60W RMS
Impedance	4 Ω
SNR	$\geq$ 95DB
Inputs	3.5 stereo, Bluetooth, optical & Control (wired)
Accessories	Remote, 3.5 aux cable, optical cable 3m, wall mount, desk mount, Classic bracket, power adaptor & 3.5mm to stereo RCA
Compatible Touchscreens	Classic 55 - 86" out of box Pulse & Display requires bracket or to be wall mounted Classic 98" requires to be wall mounted

*All information and specs contained on this document are correct at time of publication

ScreenBeam Specs

MODELS



ScreenBeam Mini2



ScreenBeam 960



ScreenBeam 1100

SKU	CBSBMINI2	CBSB960	CBSB1100
Video	H.264 compression. Supports up to full 1080p30 resolution	H.264 compression. Supports up to full 1080p30 resolution	H.264 compression. Supports up to 4K60 (HDMI), 4K30 (Windows 10 Miracast) resolution
Wireless	IEEE 802.11 a/b/g/n Dual-band 2.4 & 5GHz, 2x2 internal antenna. Security: WPA2, WPS pin pairing, AES 128-bit	Miracast P2P: 802.11ac Dual-Band. Infrastructure: 802.11a/b/g/n Dual-Band	Miracast and Local Wi-Fi Mode: 802.11ac dual-band 3x3 MIMO Network Bridge: 802.11ac dual-band 2x2 MIMO
Content Protection	HDCP 2.x for HDMI	HDCP 2.x for HDMI	HDCP 2.x for HDMI
Power	Power Input: 5V / 1A Power Consumption: < 4W	Power Input: 5V/2A Consumption: Less than 5W	Power Input: 12VDC, 3A Consumption: 8.4W
Dimensions	3.86 x 1.18 x 0.47 inch (98.04 x 29.97 x 11.93 mm)	6.61 x 6.61 x 1.36 inch (168.0 x 168.0 x 34.5 mm)	8.66 x 5.66 x 1.99 inch (220 x 144 x 50.5 mm)
Certification	Wi-Fi Miracast™, Intel® WiDi	Wi-Fi Miracast Standard	Wi-Fi Miracast Standard
A/V Interface	HDMI, Type-A male connector	HDMI Out x 1, VGA Out x 1, VGA In x 1, (Pass-through), 3.5mm Analog, Audio Out x 1	HDMI Out x 1, VGA Out x 1, VGA Out x 1, 3.5mm Analog Audio Out, 2 x USB 2.0 A, 1 x USB 3.0 A
Compatibility	• Supports native Windows 10 phones, tablets, and laptops with wireless display or Continuum functionality • Supports Wi-Fi Miracast™ Certified smartphones and tablets • Supports Intel® WiDi 4+ Ultrabooks, laptops, smartphones and tablets • Supports dual band 2.4GHz and 5GHz • Device requires Internet access to stream online content • Not compatible with Apple devices	Miracast P2P wireless display requires certified device with either: • Windows 10 build 1607 (and later) • Android 4.2 (and later) Wireless display over network requires device with either: • Windows 10 build 1709 (and later) • Windows 7 (and later) • macOS 10 (and later) • iOS 11 (and later)	Miracast P2P wireless display requires certified device with either: • Windows 10 build 1607 (and later) or Windows 8.1 • Android 4.2 (and later) Wireless display over network requires device with either: • Windows 10 build 1709 (and later) • Windows 7 (and later) • macOS 10.10 (and later) • iOS 11 (and later)

commBOX InstallMate Specs



SKU: CBMATE

This unique, heavy-duty electronically operated lift makes it easy for anyone to move and install wall mounted and trolley mounted 55-103" CommBox Touchscreens.

Eliminating the need for manual lifting, not only does the CommBox Installation Mate greatly reduce the possibility of personal injury, it provides a secure and simple means of moving and lifting CommBox Touchscreens that is both safer for the installer and the product.

Dimensions	1610 (H) x 710 (W) x 732mm (L)
Weight	28Kg
Lifting Height	1000mm
Lifting Capacity	200Kg
Lifting clearance	85mm
Wheels	260mm diameter with pneumatic tyres
Castors	50mm
Power	240V or 18V Makita li-ion battery operated (110V option available). Wired remote control

commBOX Wall Bracket Specs

Models



Exoskeleton Motorised
Wall Bracket



Invisible Motorised
Wall Bracket

SKU	CBMTRWB90	CBMTRI100 OR CBMTRI150
-----	-----------	------------------------

Dimensions

Bracket:	838 (W) x 1432 (H) x 178 (D)mm	888 (W) x 1125 (H) x 118 (D)mm
Packed:	1450 (W) x 900 (H) x 200 (D)mm	760 (W) x 1445 (H) x 145 (D)mm

Weight

Bracket:	38Kg	40Kg
Packed:	43Kg	45Kg

Touchscreen Compatibility

Up to Classic 90"	Up to 80" OR Up to 103"
-------------------	-------------------------

Finish & Construction

Black Powdercoat, Steel Frame	Black powder coat steel frame
----------------------------------	----------------------------------

Features

Cable Management, Wired Remote	Includes Clipsal Iconic 2 button wall plate for control. Cable management
-----------------------------------	---

commBOX Stands Specs

Models



Elegance Fixed Stand

CBMOBE



Motorised Stand

CBMTR5590



Manual Tilt Trolley

CBTTB6080M

SKU

Dimensions

Stand:

1160 (W) x
661 (H) x
1597 (D)mm

1130 (W) x
1620 (H) x
712 (D)mm

1070 (W) x
1200 (H) x
750 (D)mm

Packed:

1625 (W) x
785 (H) x
160 (D)mm

1450 (W) x
900 (H) x
200(D)mm

Box A: 1000 (W) x
300 (H) x 3200 (D)mm
Box B: 800 (W) x
300 (H) x 300 (D)mm

Weight

Stand:

18Kg

45Kg

40Kg

Packed:

23.5Kg

50Kg

Box A: 30Kg
Box B: 20Kg

Touchscreen
Compatibility

55" - 86"

Up to Classic 90"

55" - 80"

Finish & Construction

Grey
Powdercoated
Steel

Black
Powdercoated
Steel

Black Powdercoat,
Steel Frame

Options

-

-

Laptop tray and
Powerboard

Features

Multi-purpose shelf,
Minamalist design,
Lockable wheels,

Laptop shelf,
NUC mountings, PDU
mountings, Cable
Management, Wired
Remote

Raise & lower vertically,
Manually tilt to any angle,
Use in table top position



Tilt Trolley

CBTTB6085



MoCoW Mobile Stand

CBMOCOW-F



MoCoW Motorised Stand

CBMOCOW-M



MoCoW Tilt Stand

CBMOCOW-MT

1155 (W) x
1073 - 1735 (H) x
756 (D)mm

1630 (W) x
310 (H) x
160 (D)mm

55Kg

64Kg

55" - 80"

Black Powdercoat,
Steel Frame

Laptop Shelf

Ultra stable,
Lockable Wheels,
Laptop stand,
Easy push-button controls,
Raise & lower vertically, Tilt
to any angle, Use in table
top position 600 Stroke

856 (W) x
1642 - 1442 (H) x
603 (D)mm

Box A: 250 (W) x
1400 (H) x 250 (D)mm

Box B: 1000 (W) x
250 (H) x 730 (D)mm

42Kg

47Kg

55" - 65"

Black Powdercoat
Steel Frame

Including MoCoW
Kit

6 wheel curved
base,
Manual height,
Versatile curved
handles

856 (W) x
2055 - 1400 (H) x
603 (D)mm

Box A: 250 (W) x
1400 (H) x 250 (D)mm

Box B: 1000 (W) x
250 (H) x 730 (D)mm

56Kg

61Kg

55" - 65"

Black Powdercoat
Steel Frame

Including MoCoW
Kit

6 wheel curved base,
Raise & lower, Easy push
button control, Versatile
curved handles

856 (W) x
1544 - 869 (H) x
603 (D)mm

400 (W) x
1010 (H) x
700 (D)mm

60Kg

65Kg

55" - 65"

Black Powdercoat
Steel Frame

Including MoCoW
Kit

6 wheel curved base,
Raise, lower & tilt,
Use as table top, Easy
push button control,
Versatile curved handles

commBOX Control Core Specs



SKU: CBCONCORE

Encompassing control, digital signage, room booking, recording, whiteboarding and other education and corporate apps

Buttons	unlimited
Dimensions	95 x 95 x 18mm
Weight	150g
Power	12v DC 100mA POE IEEE 802.3 AF (optional)
Speaker	Internal
Mount	Desk
Accessories	Power Supply
Ports	
Ethernet	1
RS232	2
RS485	1
Combo	1 (IR Only)
IR Bus	1
Relay Drivers	4
Logic	1
Software	Control Editor

commBOX Joey Micro 9 Specs



SKU: ZTT2845

Pre-programmed for a large range of applications and custom programmable. A wall mounted 9 button, capacitive touch, control system with LEDs and haptic feedback. Controls IR, RS232 and contact closure using the supplied Access Port. Simple CAT5 to RJ45 connection. Includes Power Supply.

Joey Micro can directly control your equipment via Infra Red and extended range RS232. This allows Joey Micro to be a complete control solution, with far more functionality than might be assumed from just 9 buttons. Because each button is context sensitive dependant on the "virtual screen", LEDs can be programmed to indicate the mode your system is in.

Enclosure	Standard single-gang wallplate
Connectivity	Access Port Via single Cat5 (or 2 Cat5 and 10-way ribbon header for optional extra functions)
Dimensions	110 x 67 x 10mm
Weight	0.74kg
Power	12v DC at 20mA
Access Port	1x Programming port (3.5mm Jack), 1 x IR Bus (RJ45 Port), 1 x PIR (RJ45 Port), 2 x RS232 (RJ45 Port), 2 x IR (3.5mm Mono Jack), 1 x RS485 (RJ45 Port), 1 x USB & 4 X Relay Driver (Phoenix connector)
Compatibility	All IR formats supported by TCS. RS232 from 300 to 115000 baud. IRBus
Depth above mounting plane	12mm approx
Dimensions Access Port	100 x 83 x 25mm (mounting same as single gang wallplate)
Number of programmable keys	9 per Joey Micro 9 "virtual screen"
Number of virtual screens	1 to 300 depending on application

commBOX Control Pro & Lite Specs

Models



Lite



Pro

SKU	CBCONLITE	CBCONPRO
-----	-----------	----------

Buttons	unlimited	unlimited
---------	-----------	-----------

Dimensions

Product:	222 x 118 x 44mm	441 x 280 x 44mm
Packed:	305x 268x 62mm	600 x 352 x 62mm

Weight

Product:	1.34kg	4.5kg
Packed:	1.76kg	5kg

Power	12v DC 100mA
-------	--------------

Speaker	Internal	Internal & Mono Out
---------	----------	---------------------

Mount	Desk	Desk/Rack Mount
-------	------	-----------------

Accessories	Power Supply	Power Supply & Rack Brackets
-------------	--------------	------------------------------

Ports

Ethernet	1	1
RS232	2	5
RS485	1	1
Combo	4	12
IR Bus	1	1
Relay Drivers	6	12
Logic/Analog	6	6
Expansion	-	1

Software	Control Editor
----------	----------------

commBOX Control Panel Specs

Models



Panel 7

CBCONPAN7V2



Panel 7D

CBCONPAN7D



Panel 10

CBCONPAN10

SKU

Buttons

unlimited

Dimensions

182 x 120 x 25mm

182 x 120 x 25mm

167 x 249 x 26mm

Weight

0.38 kg

0.38 kg

0.64 kg

Power

DC IN - 9V - 24V, POE - IEEE 802.3 AF

Speaker

Internal

Mount

Recessed in wall or
Stand on Desk.
Bracket on wall, Adhesive
Strip to Glass,

Stand on Desk

Recessed in
wall or
Stand on Desk

Accessories

Power Supply,
In-wall Bracket
Desk Mount & Optional On-
Wall Bracket

Power Supply,
In-wall Bracket
Desk Mount

Power Supply,
In-wall Bracket
Optional Desk Mount.

Software

Control Editor

Ports

1 x Ethernet

commBOX Pulse V3 OPS Specs

Models



i5 OPS

CBIPOPSi5



i7 OPS

CBIPOPSi7

SKU		
CPU	i5	i7
Memory	4GB	8GB
Storage	128 SSD	256 SSD
Operation Temperature	0 °C - 45 °C	
Operation Humidity	10% - 90% RH	
Storage Temperature	-20 °C - 60 °C	
Storage Humidity	10% - 90% RH	
Power	110-240V 50/60Hz	
Max Power	95 W	
Standby Power	135W	
Product Dims	236.6 x 229.6 x 32mm	
Packed Dims	353 x 312 x 91mm	
Product Weight	1.86kg	
Packed Weight	2.36kg	
Ports		
Antenna	2	
USB2.0	2	
USB3.0	4	
USB3.1 Gen1 Type-C	1	
DP OUT	1	
HDMI OUT	1	
MIC IN	1	
LINE OUT	1	
VGA OUT	1	
RJ45	1	
HDD_LED	1	
POWER_LED	1	

*All information and specs contained on this document are correct at time of publication



commBOX.com.au

Proudly Designed in Australia